


Preterminated 66 Wiring Block w/12 RJ-11 Jacks 6P4C


Package Includes:

- A. 6P4C Prewired 66 Wiring Block, 1 pc
- B. 89D Mounting Bracket, 1 pc
- C. 66 Wiring Block Cover, 1 pc

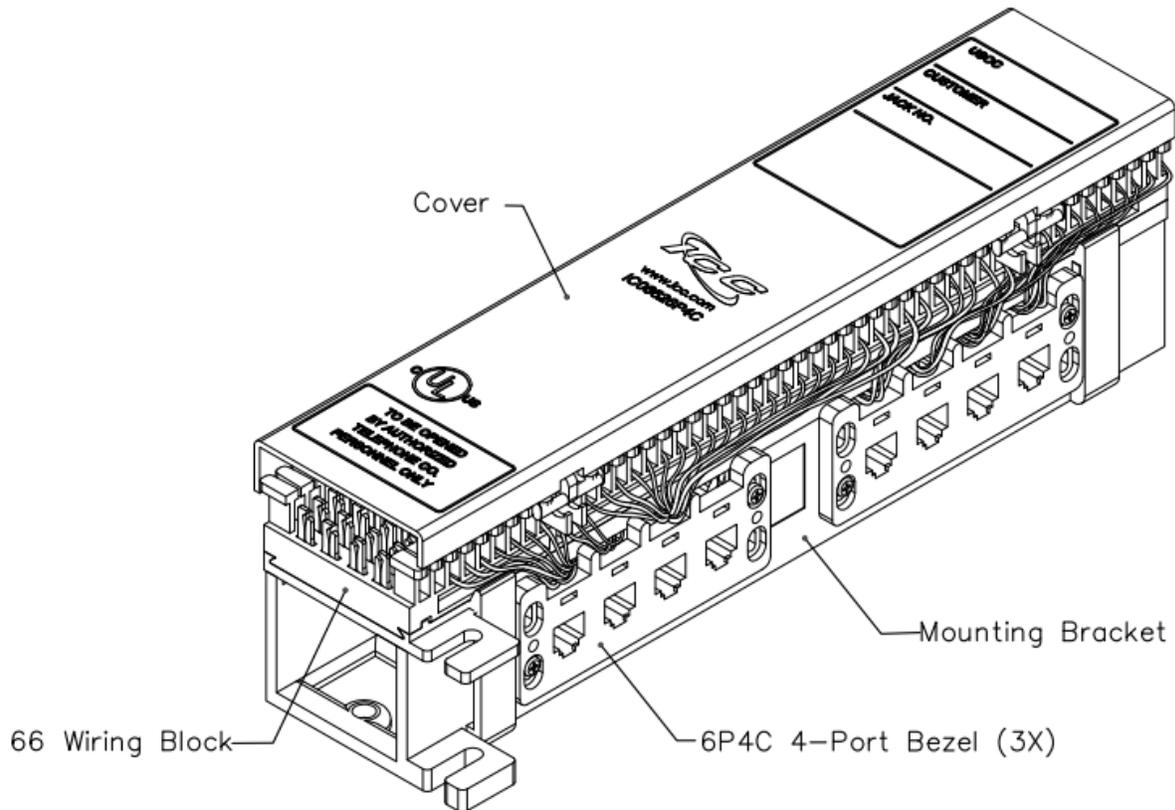

Features and Benefits

- Designed for voice, PBX systems, and low voltage telecom equipment.
- Durable and strong high impact flame retardant material.
- Includes 89D mounting bracket for wall mounting.
- Accommodates IC066BRCLP 66 wiring block bridging clips.
- Removable hinged cover provided.
- Accepts 22-24 AWG.
- Country Of Origin: Taiwan
- TAA Compliant

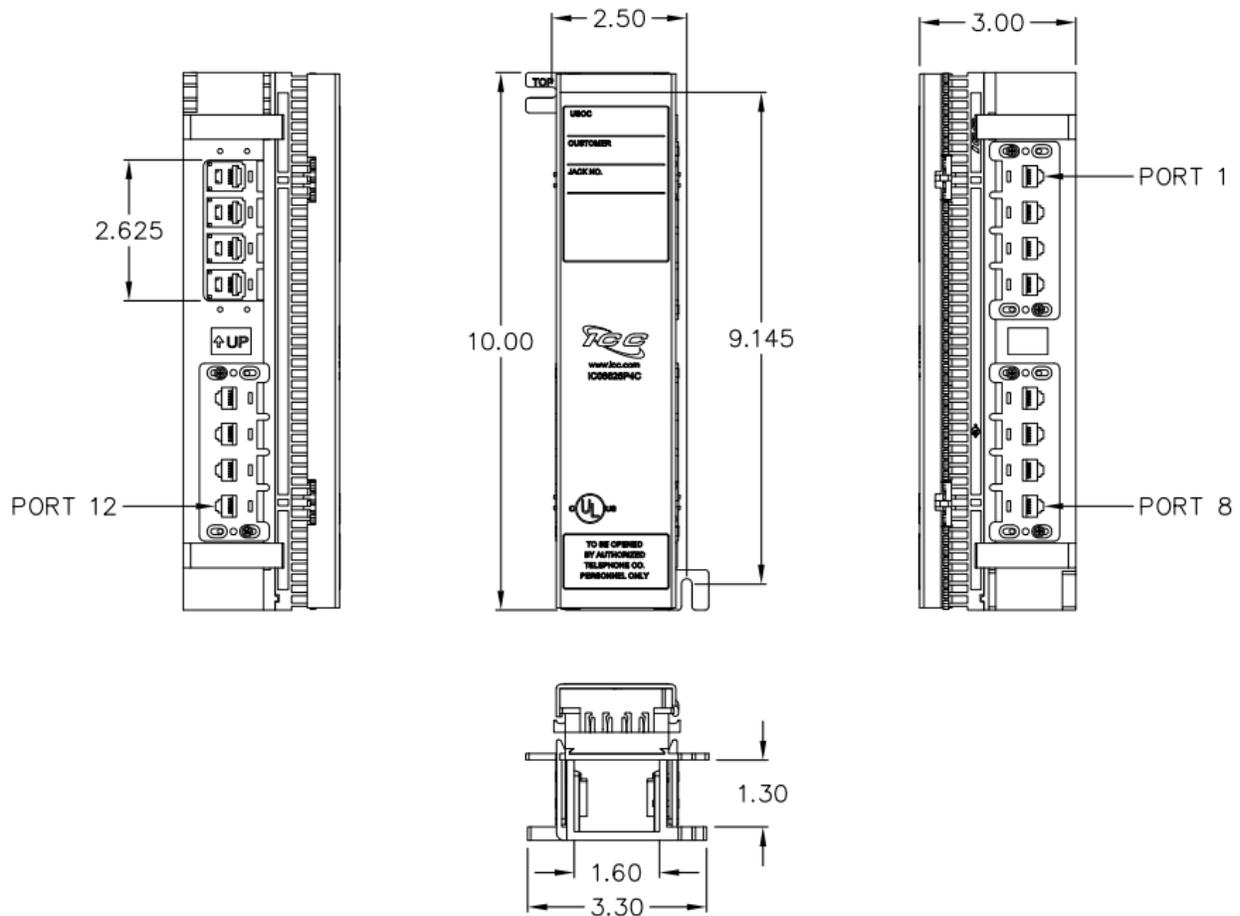

NOTE: UNLESS OTHERWISE SPECIFIED

1. MATERIAL

- A. HOUSING: HIGH IMPACT FLAME RETARDANT PLASTIC, UL 94V0
- B. IDC: BRASS WITH 100 MICRO-INCH OF TIN
- C. SPRING WIRE: PHOSPHOR BRONZE ALLOW PLATED WITH 50 MICRO-INCH OF GOLD OVER 70-100 MICRO INCH OR NICKEL

2. TEMPERATURE RANGE:


- A. STORAGE: -40° TO +70°C
- B. OPERATION: -10° TO +60°C
- C. NONCONDENSING: 93%

3. ELECTRICAL:

- A. ELECTRICAL INSULATION RESISTANCE: -500 MOHM MIN @ 100V DC
- B. DIELECTRIC WITHSTANDING VOLTAGE: -1000V RMS @ 60Hz FOR 1 MINUTE
- C. CONTACT RESISTANCE: 2.5 MOHMS MAX

4. MECHANICAL:

- A. RETENTION: 50N (11 LBF) FOR SOS ± 5S
- B. INSERTION/EXTRACTION LIFE: 750 CYCLES MINIMUM



PIN	WIRE COLOR
1	BLACK
2	RED
3	GREEN
4	YELLOW

C. IDC WIRE GAUGE: 22-24 AWG

Part No: IC06626P4C
Rev: A
Page 3 of 2

| 888-ASK-4ICC | icc.com | csr@icc.com |

