


Preterminated 66 Wiring Block w/12 EJ-45 Jacks 8P8C



Package Includes:

- A. BPBC Prewired 66 Wiring Block, 1 pc
- B. 89D Mounting Bracket, 1 pc
- C. 66 Wiring Block Cover, 1 pc

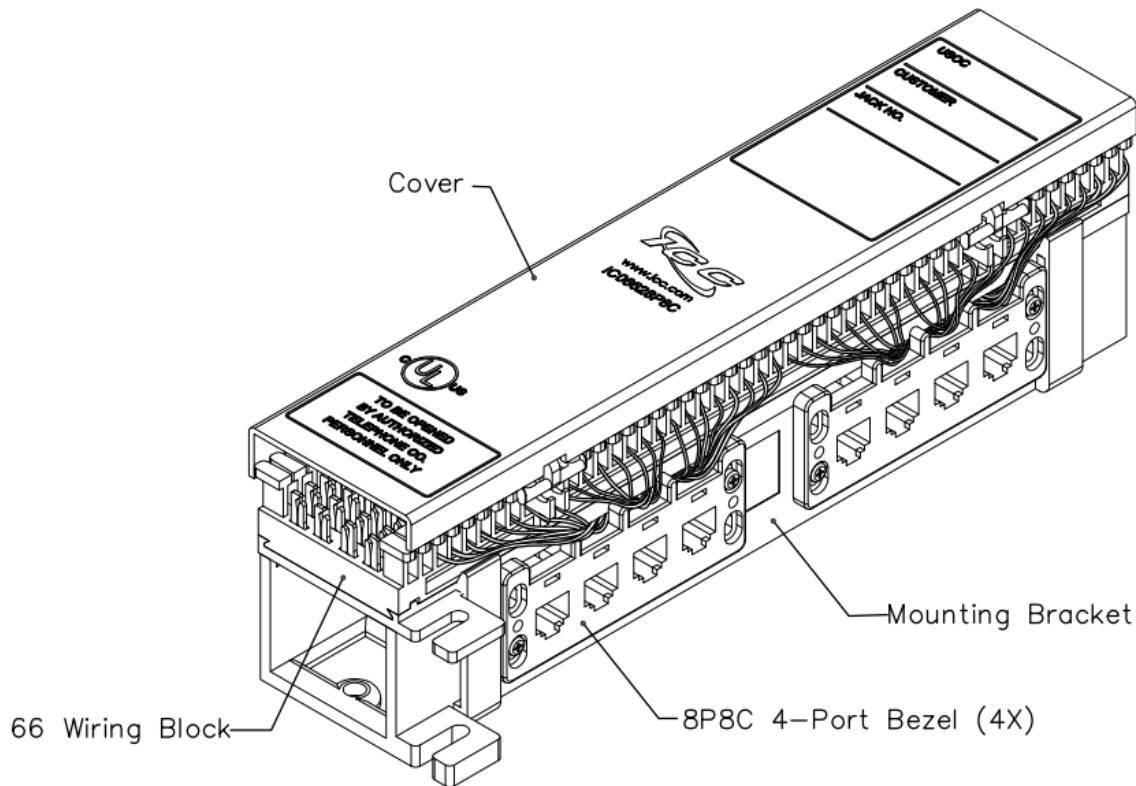

Features and Benefits

- Designed for voice, PBX systems, and low voltage telecom equipment.
- Durable and strong high impact flame retardant material.
- Includes 89D mounting bracket for wall mounting.
- Accommodates IC066BRCLP 66 wiring block bridging clips.
- Removable hinged cover provided.
- Accepts 22-24 AWG.
- Country Of Origin: Taiwan
- TAA Compliant

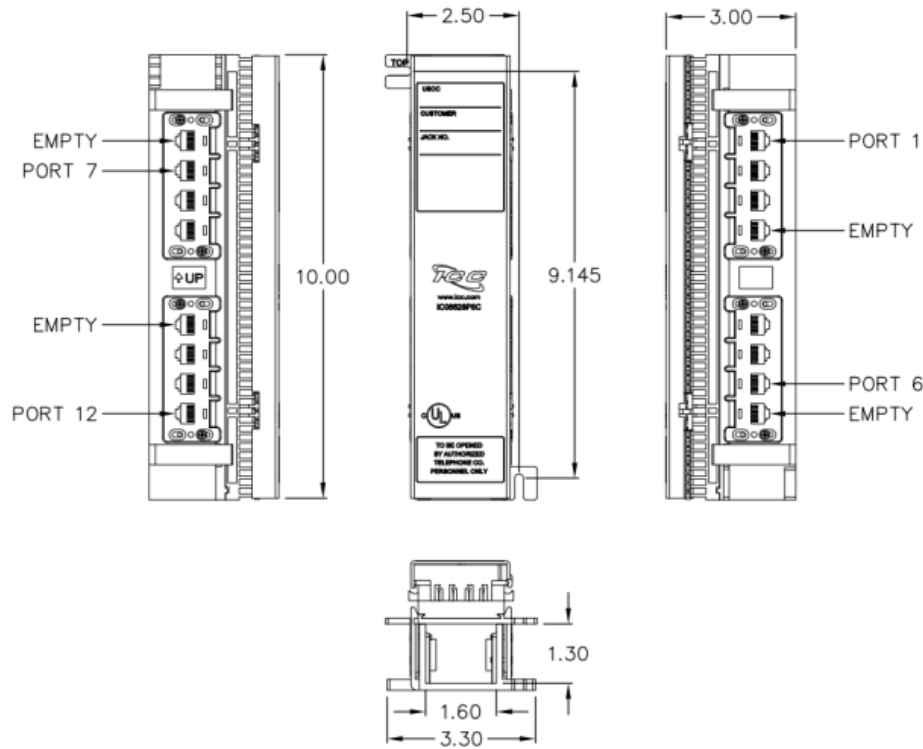

PIN	WIRE COLOR
1	BLUE
2	ORANGE
3	BLACK
4	RED
5	GREEN
6	YELLOW
7	BROWN
8	WHITE

NOTE: UNLESS OTHERWISE SPECIFIED

1. Material:

- A. HOUSING: HIGH IMPACT FLAME RETARDANT PLASTIC, UL 94VO
- B. IDC: BRASS WITH 100 MICRO-INCH OF TIN
- C. SPRING WIRE: PHOSPHOR BRONZE ALLOY PLATED WITH 50 MICRO-INCH OF GOLD OVER 70-100 MICRO INCH OR NICKEL

2. TEMPERATURE RANGE:

- A. STORAGE: -40° TO +70°C
- B. OPERATION: -10° TO +60°C
- C. NONCONDENSING: 93%

3. ELECTRICAL:

- A. ELECTRICAL INSULATION RESISTANCE: -500 MOHM MIN @ 100V DC
- B. DIELECTRIC WITHSTANDING VOLTAGE: -1000V RMS @ 60Hz FOR 1 MINUTE
- C. CONTACT RESISTANCE: 2.5 MOHMS MAX.

4. MECHANICAL:

- A. RETENTION: 50N (11 LBF) FOR 60S ± 5S
- B. INSERTION/EXTRACTION LIFE: 750 CYCLES MINIMUM
- C. IDC WIRE GAUGE: 22-24 AWG