


# Prewired 50 Pair 66 Wiring Block w/Dual Female Telco Connector

## Package Includes:

- A. Prewired 50-Pair 66 Wiring Block, 1PC
- B. 89D Mounting Bracket, 1 PC
- C. 66 Wiring Block Cover, 1 PC
- D. Female Amphenol Connector, 2 PCS

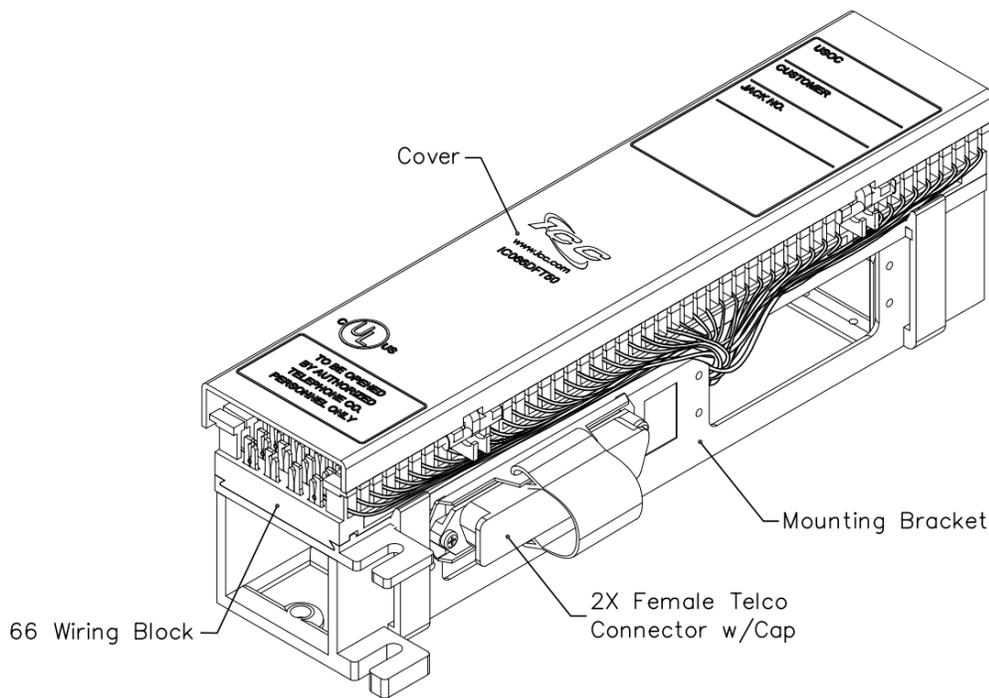

## Features and Benefits


- Two prewired female amphenol connectors facilitate installation and saves time.
- Designed for data, voice, PBX systems, and bw voltage telecom equipment.
- Performance exceeds Category Se connecting hardware requirements specified in TIA/EIA-568-C.2
- Durable and strong high impact flame retardant material.
- Includes removable 89D mounting bracket for wall mounting.
- Accommodates IC066BRCLP 66 wiring block bridging clips.
- Includes hook and loop tie security straps to maintain integrity of connection with telco assembly.
- Removable hinged cover provided.
- Accepts 22-26 AWG.
- Country Of Origin: Taiwan
- TAA Compliant

Part No: IC066DFT50  
 Rev: A  
 Page 1 of 2

| 888-ASK-4ICC | [icc.com](http://icc.com) | [csr@icc.com](mailto:csr@icc.com) |



# Product Specification

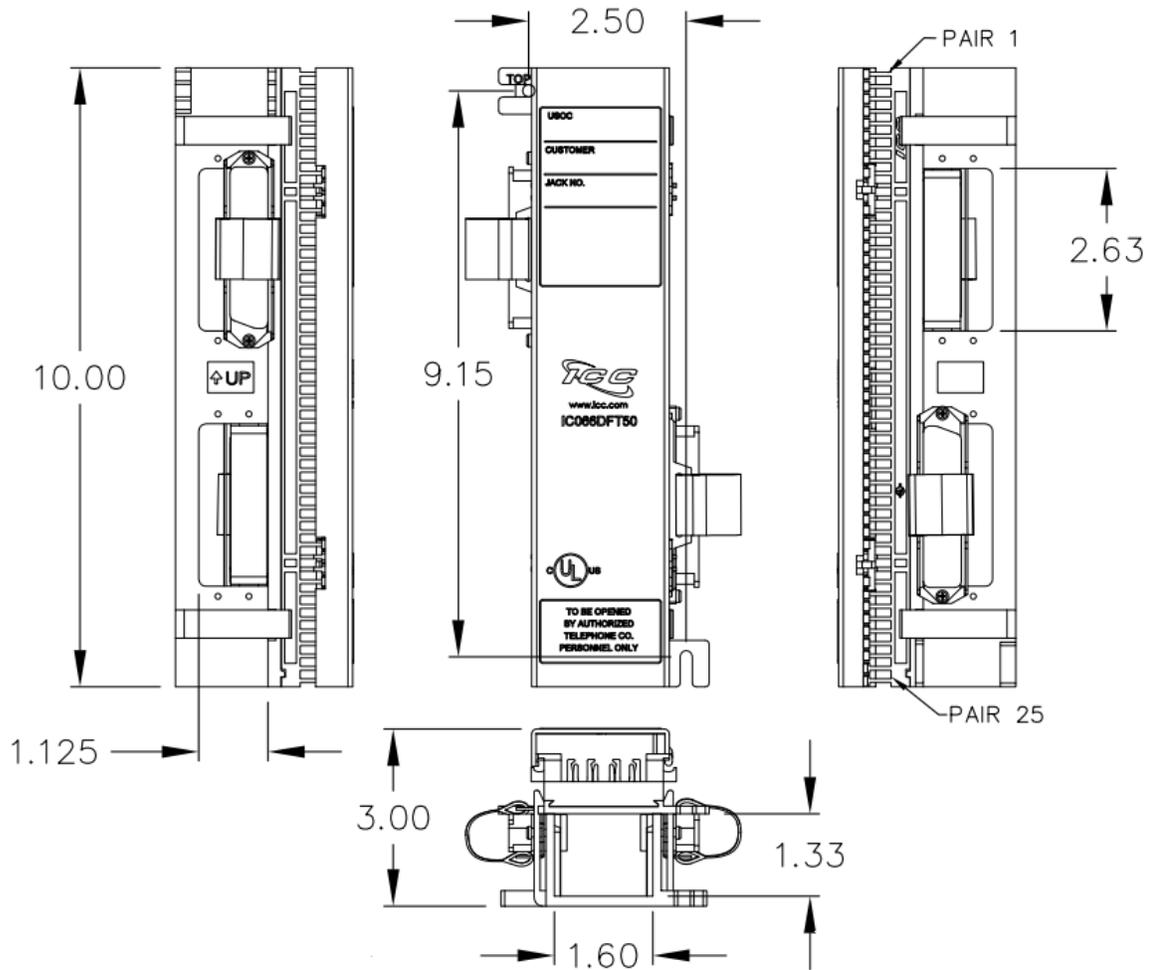

## **NOTE: UNLESS OTHERWISE SPECIFIED**

1. MATERIAL:
  - A. HOUSING: HIGH IMPACT FLAME RETARDANT PLASTIC, UL 94VO
  - B. IDC: BRASS WITH 100 MICRO-INCH OF TIN
  - C. TERMINALS: GOLD OVER NICKEL PLATED COPPER ALLOY
2. TEMPERATURE RANGE:
  - A. STORAGE: -40° TO +70°C
  - B. OPERATION: -10° TO +60°C
  - C. NONCONDENSING: 93%
3. ELECTRICAL:
  - A. ELECTRICAL INSULATION RESISTANCE: -500 MOHM MIN @ 100V DC
  - B. DIELECTRIC WITHSTANDING VOLTAGE: -1000V RMS @ 60Hz FOR 1 MINUTE
  - C. CONTACT RESISTANCE: 2.5 MOHMS MAX
4. MECHANICAL:
  - A. EXTRACTION FORCE: MINIMUM SN FOR 24 AWG MINIMUM 3N FOR 26 AWG
  - B. INSERTION/EXTRACTION LIFE: 200 CYCLES MINIMUM
  - C. IDC WIRE GAUGE: 22-26 AWG

25	VIOLET/GRAY	GRAY/VIOLET
24	VIOLET/BROWN	BROWN/VIOLET
23	VIOLET/GREEN	GREEN/VIOLET
22	VIOLET/ORANGE	ORANGE/VIOLET
21	VIOLET/BLUE	BLUE/VIOLET
20	YELLOW/GRAY	GRAY/YELLOW
19	YELLOW/BROWN	BROWN/YELLOW
18	YELLOW/GREEN	GREEN/YELLOW
17	YELLOW/ORANGE	ORANGE/YELLOW
16	YELLOW/BLUE	BLUE/YELLOW
15	BLACK/GRAY	GRAY/BLACK
14	BLACK/BROWN	BROWN/BLACK
13	BLACK/GREEN	GREEN/BLACK
12	BLACK/ORANGE	ORANGE/BLACK
11	BLACK/BLUE	BLUE/BLACK
10	RED/GRAY	GRAY/RED
9	RED/BROWN	BROWN/RED
8	RED/GREEN	GREEN/RED
7	RED/ORANGE	ORANGE/RED
6	RED/BLUE	BLUE/RED
5	WHITE/GRAY	GRAY/WHITE
4	WHITE/BROWN	BROWN/WHITE
3	WHITE/GREEN	GREEN/WHITE
2	WHITE/ORANGE	ORANGE/WHITE
1	WHITE/BLUE	BLUE/WHITE
PAIR NO.	TIP	RING
WIRE COLOR		

Part No: IC066DFT50  
 Rev: A  
 Page 2 of 2

| 888-ASK-4ICC | icc.com | csr@icc.com |

