


100 Pair Hinged 110 Wiring Block Kit

Package Includes:

- A. 100-Pair Hinged 110 Wiring Block, 1 PC
- B. 4-Pair 110 Connecting Block, 20 PCS
- C. 5-Pair 110 Connecting Block, 4 PC
- D. Label Holder, 2 PCS
- E. Designation Label, 2 PCS
- F. Cable Organizer, 4 PCS
- G. 6" Cable Tie, 4 PCS
- H. #4 x 3/4" Truss Head Tapping Screw, 4 PCS
- I. Installation Instructions, 1 sheet

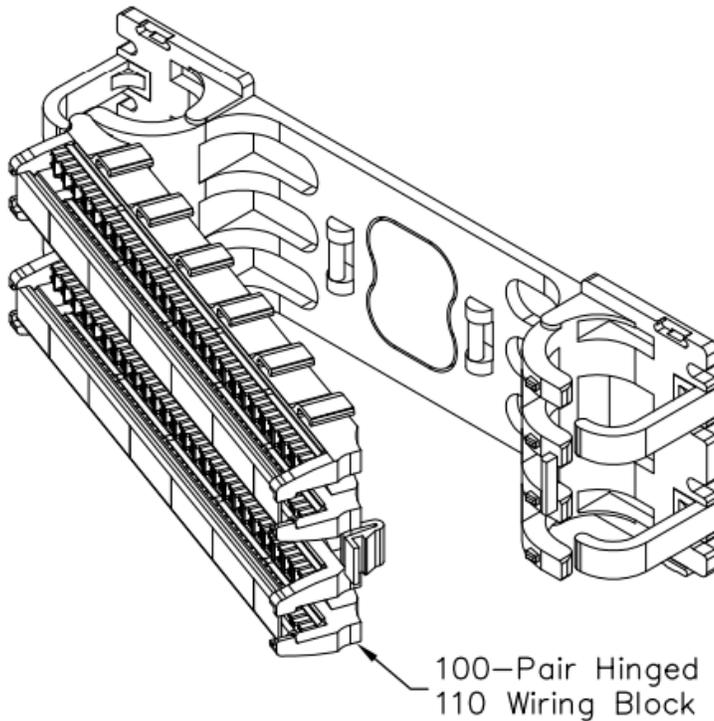


Features and Benefits

- High density wall mounted cross connect system designed for voice and data applications
- Hinged design allows block to swing open for easy access behind the block without removing the block from the wall
- Exceeds ANSI/TIA-568-C requirements for permanent, channel link and component performances
- Easy system administration with designation labels and label holders
- Used with IC110 cable management blocks, ICACSPD00 and ICACSPDT05 110 punch down tools
- Installation instructions #MSR-0347 included
- UL 1863 compliant
- Country Of Origin: Taiwan
- TAA Compliant

Part No: IC110H1004
Rev: A
Page 1 of 2


| 888-ASK-4ICC | icc.com | csr@icc.com |



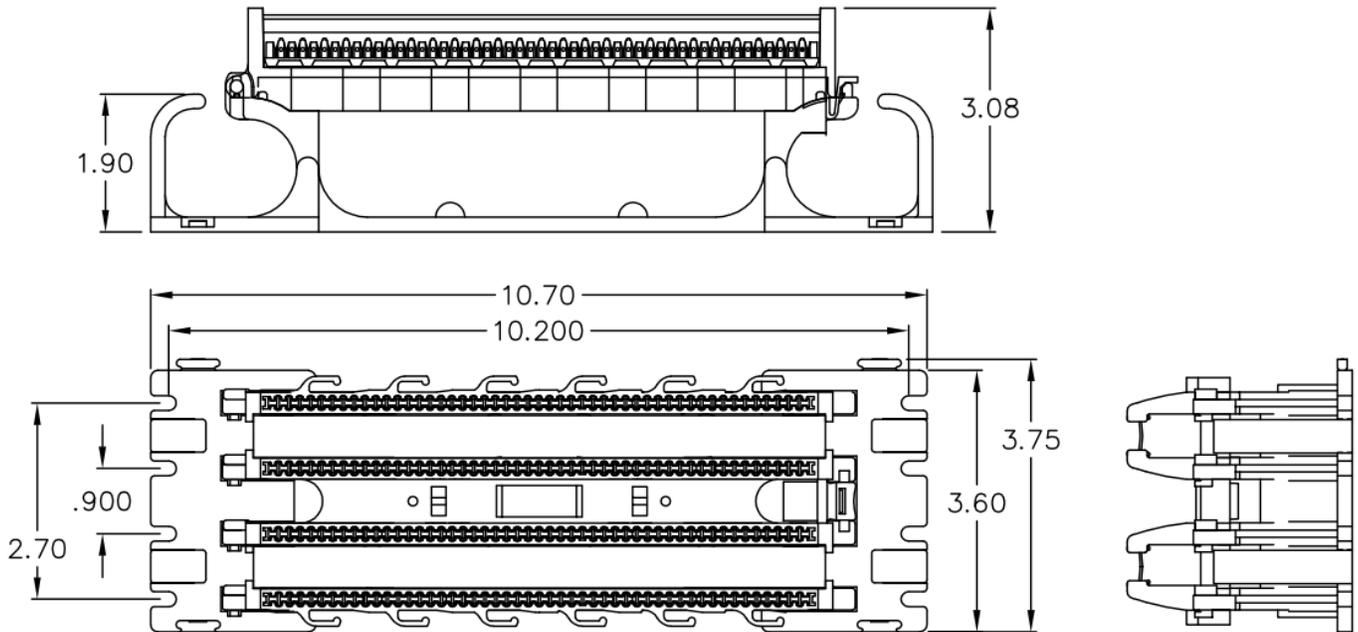


NOTE: UNLESS OTHERWISE SPECIFIED FOR 110 WIRING BLOCK

1. MATERIAL: PC, UL 94V-0
2. COLOR: IVORY

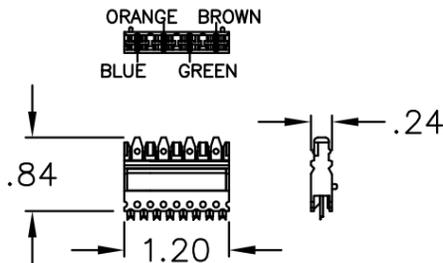

NOTE: UNLESS OTHERWISE SPECIFIED FOR 4 PAIR 110 CONNECTING BLOCK

2. MATERIAL:
 - C. CONTACT: COPPER ALLOY, 100 MICRO INCHES BRIGHT SOLDER OVER 100 MICRO INCHES OF NICKEL UNDERPLATE
 - D. HOUSING: ABS, UL 94V-0

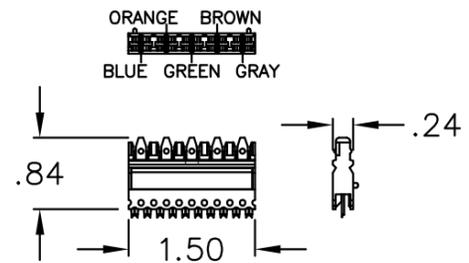

NOTE: UNLESS OTHERWISE SPECIFIED FOR 5 PAIR 110 CONNECTING BLOCK

1. MATERIAL:
 - A. CONTACT: COPPER ALLOY, 100 MICRO INCHES BRIGHT SOLDER OVER 100 MICRO INCHES OF NICKEL UNDERPLATE
 - B. HOUSING: ABS, UL 94V-0

CAT 5e CONNECTING HARDWARE REQUIREMENTS										
FREQUENCY (MHz)	1.0	4.0	8.0	10.0	16.0	20.0	25.0	31.25	62.5	100
NEXT LOSS (db)	65.0	65.0	64.9	63.0	58.9	57.0	55.0	53.1	47.1	43.0
FEXT LOSS (db)	75.1	63.1	57.0	55.1	51.0	49.1	47.1	45.2	39.2	35.1
RETURN LOSS (db)	35.0	35.0	35.0	35.0	35.0	34.0	32.0	30.1	24.1	20.0
INSERTION LOSS(db)	0.10	0.10	0.10	0.10	0.20	0.20	0.20	0.20	0.30	0.40

