
Category 5e 8P8C RJ-45 Plug (Stranded Wires)

Package Includes:

- A. CAT 5e 8P8C Plug, 100 PCS
- B. Loading Bar, 100 PCS

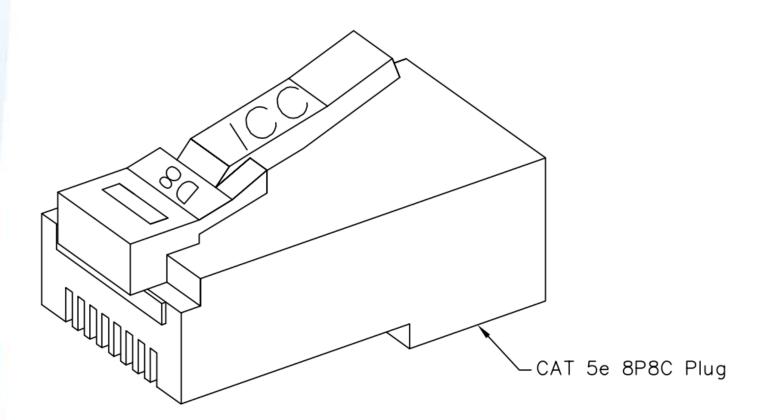

Features and Benefits

- Designed for 8-position 8-conductor, stranded wires, round CAT 5e UPT cables
- Loading bar allows for enhanced performance and easily
- Ideal for customization of patch cords for voice or data applications

alteration or unauthorized use without ICC's approval is strictly prohibited. ICC and the ICC logo are registered trade name and trademark of ICC. All rights reserved.


- Meets ANSI/TIA/EIA-568-B.2 Category 5e requirements
- Accepts 26-24 AWG stranded wires
- Used with ICACSCT845 and ICACSCT864 crimping tools.
- UL recognized
- Country Of Origin: Taiwan
- TAA Compliant


Part No: ICMP8P8C5E


Rev: B Page 1 of 2 I 888-ASK-4ICC icc.com csr@icc.com





Product Specification
















NOTE: UNLESS OTHERWISE SPECIFIED

- 1. ELECTRICAL:
 - A. ULAPPLICATIONS: RATED 2A, 150V
 - B. DIELECTRIC WITHSTANDING VOLTAGE: 500 VOLTS AC
 - C. INSULATION RESISTANCE: 500 MOHMS
 - D. TERMINATION RESISTANCE: 35 MILLIOHMS MAX AFTER ENVIRONMENTAL TESTING
- 2. MECHANICAL:
 - A. CABLE-TO-PLUG TENSILE STRENGTH: 20 LBS [89N] MIN
 - B. DURABILITY: 200 MATING CYCLES
- 3. MATERIAL & FINISH:
 - A. HOUSING: PC, UL94V-0
 - B. COLOR: CLEAR
 - C. CONTACT: HIGH STRENGTH COPPER ALLOY, GOLD PLATING OVER 100 MICRO INCH NICKEL
 - D. GOLD PLATING: 1.27 MICRON/SO MICRO INCH MIN
 - E. CONDUCTOR: 24 AND 28 AWG STRANDED

Part No: ICMP8P8C5E

Rev: B Page 2 of 2 I 888-ASK-4ICC icc.com csr@icc.com



© Copyright 2018, ICC. This document and the designs, specifications and information contained herein are the property of ICC. Reproduction, modification, alteration or unauthorized use without ICC's approval is strictly prohibited. ICC and the ICC logo are registered trade name and trademark of ICC. All rights reserved.