


Mini Net Media Center Combo Voice/Data/Video



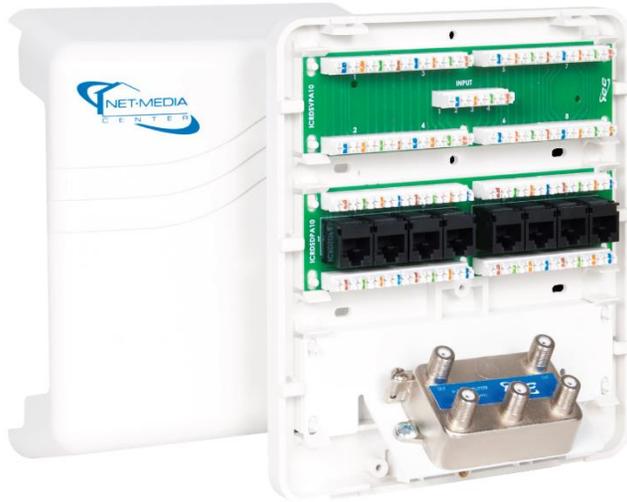


Package Includes

- A. Mini Net Media Center Cover, 1 PC
- B. Mini Net Media Center Base, 1 PC
- C. 8-Port Telephone Module, 1 PC
- D. 8-Port CAT 5e Data Module, 1 PC
- E. 2 GHz 1x4 Video Splitter Module, 1 PC
- F. #6-32 x 1/2" Cover Screw, 1 PC
- G. #6 x 1" Mounting Screw, 3 PCS
- H. Installation Instructions, 1 Sheet

Features and Benefits

- Provides excellent solution for condos, town homes, smaller homes, and for remodeling installations
- Designed to be surface mounted, and suited for compact area with flexible needs for distribution of voice, data, audio, or video with dual side access for easy cable entry and exit
- Includes 8-port telephone module and 8-port CAT 5e data module, and 2 GHz 1x4 Video splitter module
- 8-port telephone module is bridged, supports up to 4 incoming telephone lines with 8 outputs per each line
- 8-port CAT 5e data module exceeds ANSI/TIA-568-C requirements for permanents, channel link and component performances.
- Video splitter module is designed with 1 input and 4 output with a frequency range of 5 to 2300 MHz providing excellent signal quality for splitting cable or antenna signals
- Net Media Center enclosures are not designed to be installed in firewall applications
- Complies with UL 1863, TIA-568-C, TIA-570-B, and TIA-607 standards.
- Telephone and Data Module can be wired accordance to T568B (just switch the green and orange pair)

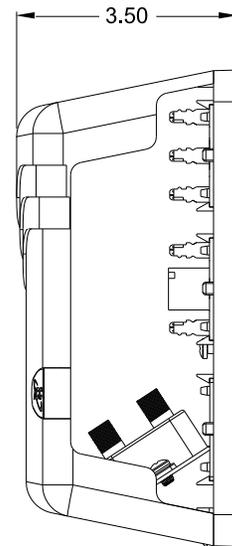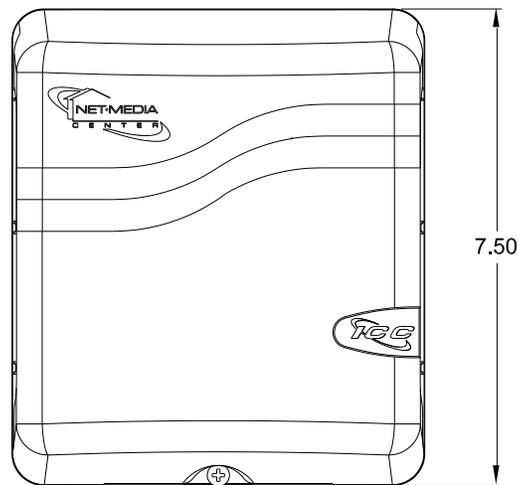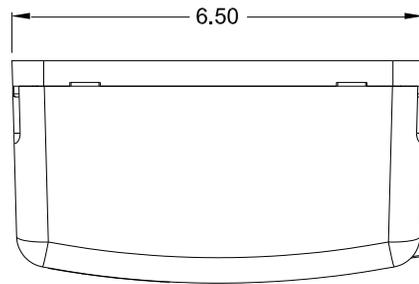

NOTE: UNLESS OTHERWISE SPECIFIED

1. Mini Net Media Center:

- A. Material: ABS, UL 94V-0
- B. Surface Finish: Texture
- C. Color: White

2. 8-Port Telephone Module:

- A. Material: Glass Epoxy FR-4 Copper Clad .062" Thick per MIL-P-13949
- B. Finish: Electroplated Solder with Hot Solder Dip
- C. Wiring in Accordance to T568A

3. 8-Port CAT 5e Data Module:

- A. Material: Glass Epoxy FR-4 Copper Clad .062" Thick per MIL-P-13949
- B. Finish: Electroplated Solder with Hot Solder Dip
- C. Wiring in Accordance to T568A

4. 2 GHz 1x4 Video Splitter Module:

- A. Housing: Zinc Alloy Die-Casting Case with Nickel Plated
- B. Frequency Range: 5~2300 MHz
- C. Insertion Loss: 15 dB Typical