



9" PLASTIC NET.MEDIA CENTER


ICRESDC9PE, ICRESDC9PW, ICRESDC9PK

ICC's 9" Plastic Net.Media Center is designed to be installed in a residence; such as small homes, multi-unit dwellings and retrofitting existing homes and serve as the central distribution point for voice, data, audio and video connectivity. Its compact size makes it perfect for smaller types of structured cabling installations allowing it to fit in tight and confined areas. The base is designed to fit between 16" wall studs and offers a variety of mounting options. It can be installed inside the wall for a professional clean appearance, or wall mounted if the walls have already been installed and painted. The Net.Media Center can be configured to hold up to four (4) mounting modules, including ICC Net.Media Center connectivity modules.




Package Content

1. Enclosure (14.25" x 9.00" x 3.625") – 1 piece
2. Cover (15.00" x 9.40" x 1.00") – 1 piece
3. Installation Instructions – 1 piece
4. #10-24 x 1" Wood Screws – 4 pieces
5. #6-32 x 7/8" Machine Screws – 2 pieces
6. Connectivity Modules Included:
 1. Model E (ICRESDC9PE): None
 2. Model W (ICRESDC9PW):
 - A. 8-Port CAT 6 Data – 1 piece
 - B. 8-Port Telephone Module w/RJ31x – 1 piece
 3. Model K (ICRESDC9PK):
 - A. 8-Port CAT 6 Data – 1 piece
 - B. 8-Port Telephone Module w/RJ31x – 1 piece
 - C. 2 GHz Video Splitter 1x6 – 1 piece

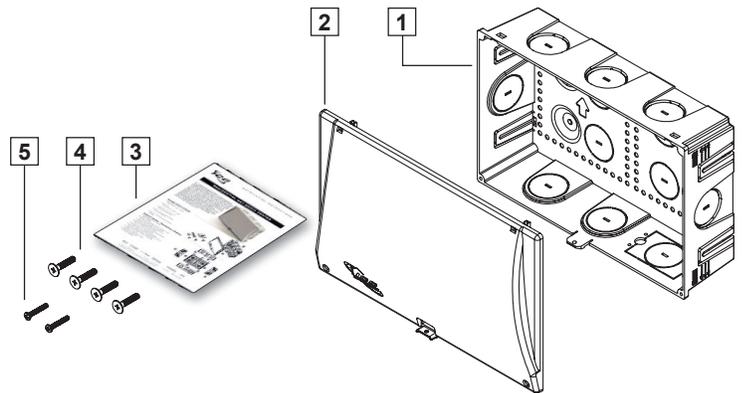

Features

- A. Light-weight ABS plastic construction
- B. Holds up to 4 mounting modules
- C. 110 power knockout for an AC power outlet (optional)
- D. 3 top, 3 bottom, 4 rear, and 2 side cable entry knockouts
- E. 4 surface screw mounts
- F. Extendable mounting tabs
- G. Padlock option for additional security (padlock not included)
- H. Dry wall markings

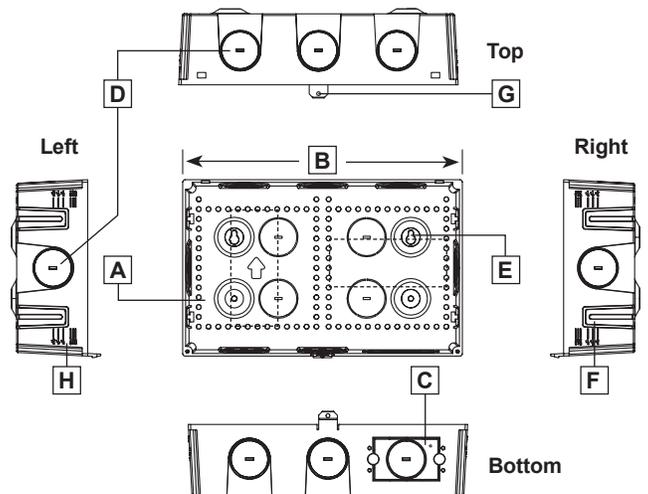


Email us: cs@icc.com | Go online: icc.com




9" PLASTIC NET.MEDIA CENTER

Enclosure Mounting

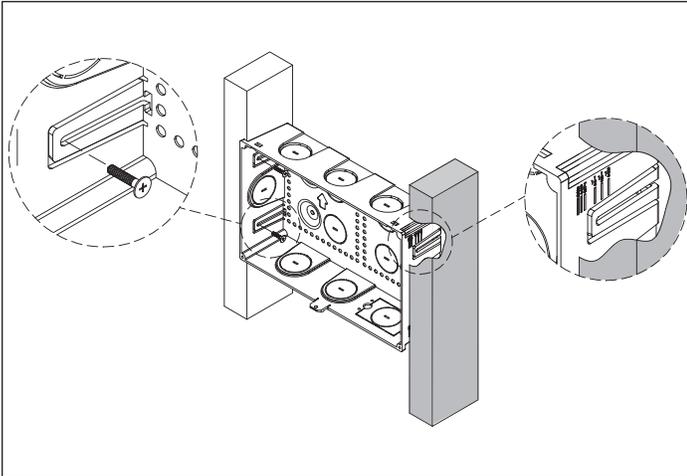


Stud Mount

With the supplied mounting screws, install the enclosure between wall studs. Adjust the enclosure according to the thickness of the drywall/sheetrock. Use the drywall marking on the side of the enclosure for guidance.

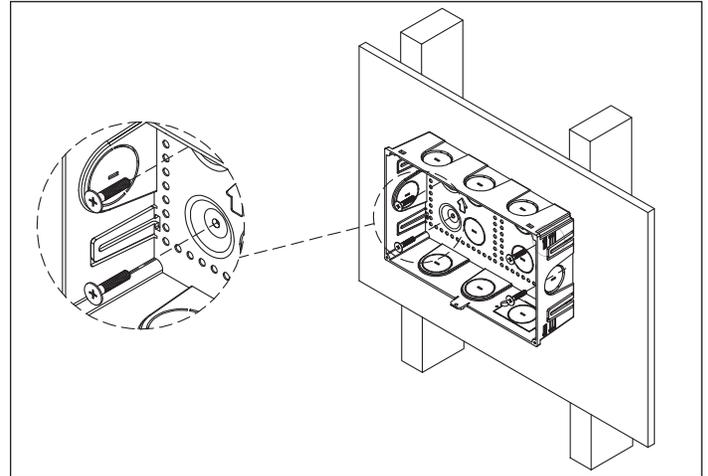


Surface Mount

With the supplied mounting screws, install the enclosure using the four surface screw mounts.

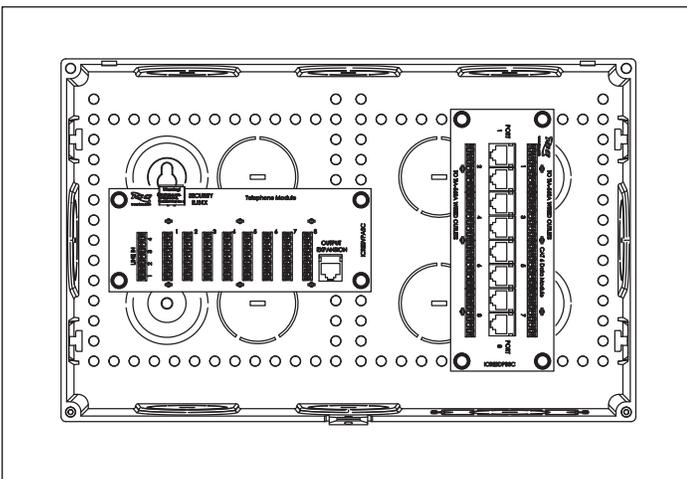

Modules Installation

Mount modules vertically or horizontally.

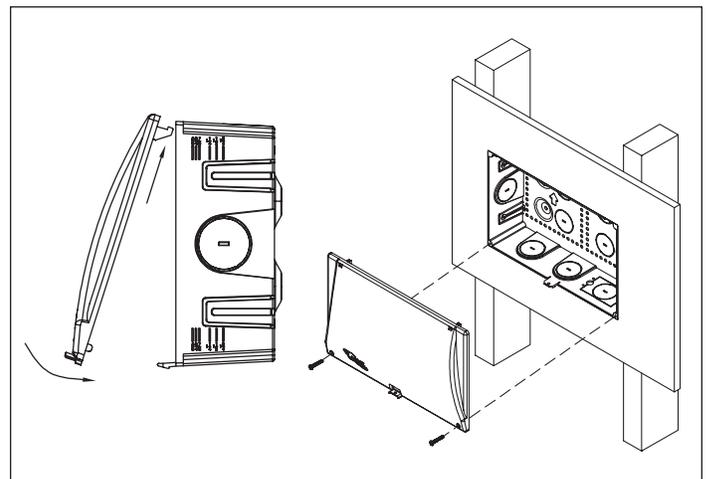

Cover Installation

1. Secure the top portion of the cover by sliding the covers hooking mechanism onto the enclosure.
2. Then secure the bottom portion of the cover with the catch latch located at the bottom center of the enclosure. Install #6-32 screws to secure the door with the enclosure.
Optional: Use a padlock to restrict access.

Email us: cs@icc.com | Go online: icc.com